



FLOOR

FOREST PARK™
COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Photo features Timberland 6 x 36 and 9 x 36 field tile on the floor.

Enjoy the Beautiful Look of Hardwood in a Durable Tile

Make a statement with the Forest Park™ collection from Daltile. This line exemplifies the splendor and style of hardwood. Unlike natural wood, Forest Park can withstand moisture and high traffic, making it ideal for kitchen and bathrooms. From its durable design to its extraordinary style, Forest Park has the striking look to transform your space.

- **STUNNING & DURABLE**
 - Exemplifies the natural beauty and sophistication of hardwood, with the durability of tile
 - Available in two plank size options for your space
 - Perfect for high-traffic and high-moisture areas
- **RICH WOOD COLOR TONES**
 - Contemporary white and gray colors offer a fresh feel, while lighter neutral options are perfect for any space
 - Dark wood tones offered are sure to create a stunning impact

 **PRE-CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

 **REVEAL IMAGING®**

 **TRU-EDGE**

All or select items within this series are made in the USA. For more information, visit daltile.com/ForestPark

 **CERTIFIED PORCELAIN TILE**
0.0% or less water absorption

FLOOR TILE




WHITE OAK FP94




SUMMERTREE FP95




SUGARMAPLE FP96

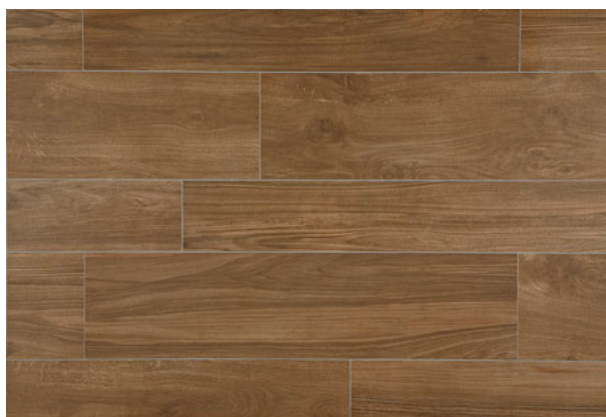

TIMBERLAND FP97

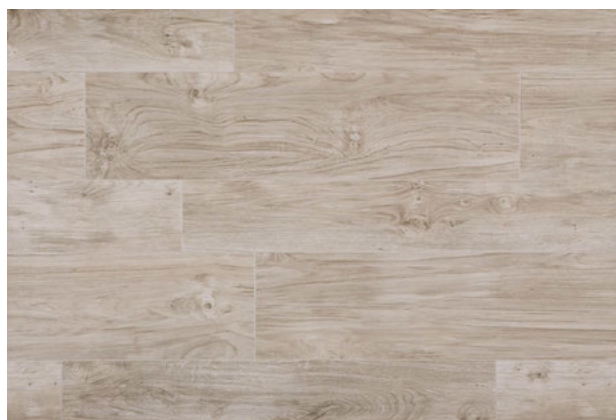

WILLOWGROVE FP98

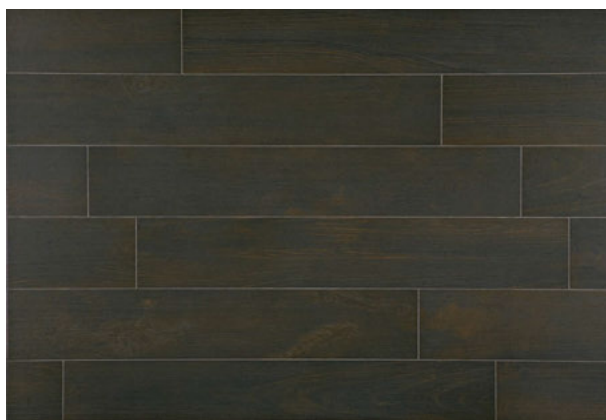



BLACKWOOD FP99

FOREST PARK™

COLORBODY™ PORCELAIN

SIZES

			Thickness	Sq. Ft. Per Carton	Pieces Per Carton
	9 x 36 Field Tile	(8-7/8" x 35-1/4") (22.50 cm x 89.50 cm)	3/8"	13.02	6
	6 x 36 Field Tile	(5-3/4" x 35-1/4") (14.70 cm x 89.50 cm)	3/8"	12.78	9

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1–2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.daltile.com/dcof.




OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

	Type	Number	Size
	Bullnose	S-43H9	3 x 18
	Cove Base	S-36C9T	6 x 12
	Cove Base Outcorner	SC-36C9T	1 x 6

Floor bullnose, cove base and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 High (V3)

TEST RESULTS

	ASTM#	Floor Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration needs to be given when installing tiles 20" and larger. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (3/16)